



宁波上鑫脚轮有限公司
Ningbo Shangxin Caster Wheels Co.,Ltd
生产基地:浙江省余姚市朗霞街道锦盛路 187 号
Factory Address: No.187, Jinsheng road,Langxia street, Yuyao city, Zhejiang province.
电话(TEL): +86 0574-62188162 传真(FAX): +86 0574-62190682

Shangxin Caster



上鑫 公司简介



“上鑫脚轮”公司生产基地位于长三角腹地外贸出口城市宁波。毗邻宁波港，杭州和上海，交通方便快捷有地铁，轻轨，高铁，航空，船运和陆运；原材料，半成品和成品集散地。厂区占地面积 8000 多平方米，拥有稳定的技术设计、质量检测各项目技术人员和员工团队，生产测试设备齐全。

本司始建于 2015 年,经历了从 OEM 代工生产到自主 研发经营自有品牌“AZY”等阶段，现本公司生产、设计技术已逐步发展成熟。更在市场竞争中不断的累积经 验和开拓研发创新，本公司已研制出适用于各种不同温度、湿度环境的脚轮，如：聚氨酯轮、机场轮、水平调节轮、医疗轮、耐高温轮、导电轮、超级人造胶 TPR 轮、低重心轮、牵引轮、减震轮等高科技产品。产品通过安全认证和测试，出口销往欧洲、美洲、中东、及东南 亚等多个国家地区；内销华中、华南、西南地区等各大中城市。

“上鑫脚轮”采用先进的设计理念、最新的材料合成技术、合适的辅助材料保证脚轮使用灵活方便、经久耐用，能适应于各 种不同场合。产品具有耐磨、耐撞击、抗化学腐蚀、耐低温、耐高温、高弹性、行驶无轮印、保护地板、噪音小、环保等 优越的性能。

“坚持与创新”是上鑫脚轮公司的发展理念，我们将不断提升产品的性价比及竞争力，为广 大客户提供优质的脚轮产品和完善的 脚轮配套使用方案，成为各脚轮使用单位的最佳合作伙伴。

Shangxin caster company's production base is located in the hinterland of Yangtze River Delta export city Ningbo. Adjacent to Ningbo port, Hangzhou and Shanghai, the transportation is convenient and fast, with Metro, light rail, high-speed rail, aviation, shipping and land transportation; raw materials, semi-finished products and finished products distribution center. The plant covers an area of more than 8000 square meters, with stable technical design, quality inspection, technical personnel and staff team of various projects, and complete production and testing equipment.

Founded in 2015, the company has experienced the stages from OEM production to independent R & D and operation of its own brand "AZY". Now, the company's production and design technology has gradually developed and matured. More in the market competition in the continuous accumulation of experience and development and innovation, the company has developed suitable for a variety of different temperature, humidity environment casters, such as: polyurethane casters, airport casters,leveling casters, medical casters, high temperature casters, conductive casters, super TPR casters, low profile casters, traction casters, damping casters and other high-tech products. The products have passed the safety certification and testing, exported to Europe, America, the Middle East, Southeast Asia and other countries and regions; domestic sales in Central China, South China, Southwest China and other large and medium-sized cities.

Shangxin caster adopts advanced design concept, the latest material synthesis technology and appropriate auxiliary materials to ensure that the caster is flexible, convenient and durable, and can adapt to various occasions. The products have the advantages of wear resistance, impact resistance, chemical corrosion resistance, low temperature resistance, high temperature resistance, high elasticity, no wheel printing, floor protection, low noise, environmental protection and other superior performance.

"Persistence and Innovation is the operation concept of Shangxin. We will continually improve the production cost performance and competitive power to supply customers high quality casters and perfect caster matching options, try to become the best partner of all casters users.

上鑫脚轮目录

CONTENTS



医疗轮 MEC 系列
Medical Caster MEC Series



03

医疗轮 MTC 系列
Medical Caster MTC Series



07

医疗包罩轮系列
Medical Caster Ladle Cover Series



10

不锈钢轮系列
Stainless Steel Caster Series



13



医疗脚轮介绍
Medical Caster Introduction


全塑医疗轮主要用于各类型医院病床、医疗设备、高档能厅、大型超市等场合使用，产品主要性能:防热、抗静电、抗冲击、抗化学耐腐蚀、耐磨、环保、无噪音，产品齐全，可为客户提供不同颜色不同尺寸的医疗单轮和双轮。

All plastic medical wheel is mainly used in various types of hospital beds, medical equipment, high-grade energy hall, large supermarkets and other occasions. The main performance of the product is: anti cooked, anti-static, anti-impact, anti-chemical, anti-corrosion, anti-wear, environmental protection no noise, complete products, can provide customers with different colors and sizes of medical single wheel and twin wheel.


安装尺寸图
Fitting Dimension

Size	Height of installation	Rotating radius	Plate thickness	Bracket
				
3 inch	120	70.5	3.5	Injection molding
4 inch	149	87	3.5	Injection molding
5 inch	177.5	101.5	3.5	Injection molding


尺寸单位
Size Units:(mm)

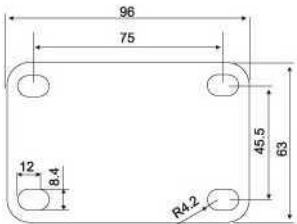


平板
Top plate



丝杆
Threaded stem



孔顶
Bolt Hole



插杆(圆)
Solid Stem(Round)



医疗轮 MEC 系列
Medical Caster MEC Series

3 Inch 4 Inch 5 Inch

Bearing : 6202



Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
3 inch	76	32	90	6202	TPR
4 inch	101	32	120	6202	TPR
5 inch	126	32	135	6202	TPR



Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
3 inch	76	32	90	6202	TPR
4 inch	101	32	120	6202	TPR
5 inch	126	32	135	6202	TPR

医疗轮 MEC 系列(圆边)
Medical Caster MEC Series (Round rim)



CP7C-MEC-JPS76.32
CP7C-MEC-JPS101.32
CP7C-MEC-JPS126.32



CP7C-MEC-JPB76.32
CP7C-MEC-JPB101.32
CP7C-MEC-JPB126.32



CP7C-MEC-JTS76.32
CP7C-MEC-JTS101.32
CP7C-MEC-JTS126.32



CP7C-MEC-JTB76.32
CP7C-MEC-JTB101.32
CP7C-MEC-JTB126.32



CP7C-MEC-JHS76.32
CP7C-MEC-JHS101.32
CP7C-MEC-JHS126.32



CP7C-MEC-JHS76.32
CP7C-MEC-JHS101.32
CP7C-MEC-JHS126.32



CP7C-MEC-JRS76.32
CP7C-MEC-JRS101.32
CP7C-MEC-JRS126.32



CP7C-MEC-JRS76.32
CP7C-MEC-JRS101.32
CP7C-MEC-JRS126.32

医疗轮 MEC 系列(平边)
Medical Caster MEC Series (Flat rim)



CP7P-MEC-JPS76.32
CP7P-MEC-JPS101.32
CP7P-MEC-JPS126.32



CP7P-MEC-JPB76.32
CP7P-MEC-JPB101.32
CP7P-MEC-JPB126.32



CP7P-MEC-JTS76.32
CP7P-MEC-JTS101.32
CP7P-MEC-JTS126.32



CP7P-MEC-JTB76.32
CP7P-MEC-JTB101.32
CP7P-MEC-JTB126.32



CP7P-MEC-JHS76.32
CP7P-MEC-JHS101.32
CP7P-MEC-JHS126.32



CP7P-MEC-JHS76.32
CP7P-MEC-JHS101.32
CP7P-MEC-JHS126.32



CP7P-MEC-JRS76.32
CP7P-MEC-JRS101.32
CP7P-MEC-JRS126.32



CP7P-MEC-JRS76.32
CP7P-MEC-JRS101.32
CP7P-MEC-JRS126.32




医疗轮 MTC 系列

Medical Caster MTC Series

在平面上,没有多余的装饰,来自心灵的呼唤,
一切回归自然,构起自然界的空明。
Simple design of the exterior one of the emptiness
of the nature,which is widely calling form the
deepest part of your heart..

医疗轮 MTC 系列

Medical Caster MTC Series

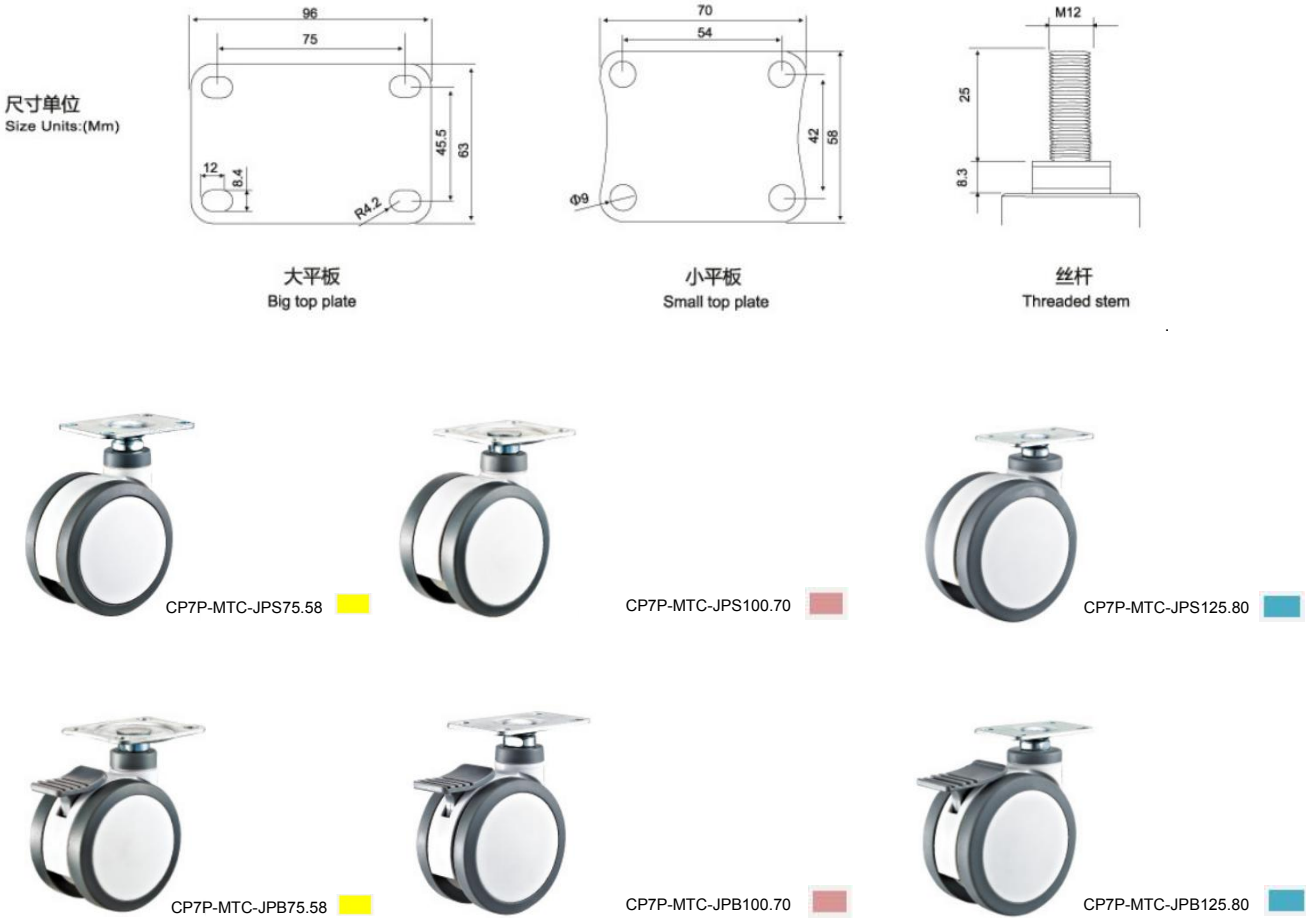

安装尺寸图
Fitting Dimension

Size	Height of installation	Rotating radius	Plate thickness	Bracket	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
3 inch	105.5	60.5	2.5	Injection molding	75	58	60	Ball bearings	PA+PU
4 inch	138.5	79.5	2.5	Injection molding	100	70	80	6001	PA+PU
5 inch	160	101.5	2.5	Injection molding	125	80	100	6202	PA+PU



医疗轮常规系列
Medical Caster Normal Series




CP7P-STU-CBS75.32
CP7P-STU-CBS10032
CP7P-STU-CBS125.32



CP7P-STU-CBS75.32
CP7P-STU-CBS10032
CP7P-STU-CBS125.32

尺寸单位
Size Units:(Mm)



插杆(方)
Solid stem (Square)



CP7P-MTC-JTS75.58



CP7P-MTC-JTS100.70



CP7P-MTC-JTS125.80



CP7P-MTC-JTB75.58



CP7P-MTC-JTB100.70



CP7P-MTC-JTB125.80

安装尺寸图
Fitting Dimension

Size	Height of installation	Rotating radius	Plate thickness	Bracket	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
3 inch	118	65	2	Injection molding	75	32	70	6202	PU/TPR
4 inch	130	84	2	Injection molding	100	32	90	6202	PU/TPR
5 inch	128	105	2.5	Injection molding	126	32	145	6202	PU/TPR

安装尺寸图
Fitting Dimension

Size	Height of installation	Rotating radius	Bracket	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
3 inch	94.5	60.5	Injection molding	75	58	60	Ball bearing	PA+PU
4 inch	127.5	79.5	Injection molding	100	70	80	6001	PA+PU
5 inch	149	101.5	Injection molding	125	80	100	6202	PA+PU





TPR 系列及属性
TPR Series And Property

超强度塑料芯热塑超级人造胶,其承载高、启动轻、回弹性、耐磨、抗化学耐腐蚀、环保、无噪音等等其性能优越,轻型尺寸 32mmx76、90、100、125mm.重型尺寸 50x 100、125、150、200mm。轴承可配一体轴承，滚针，特尔灵、标准轴承 等，颜色可根据客户要求进行调配。


TPR wheels have advantages like strong load capacity, light operation, good elasticity, wear-resistance, chemical corrosion resistance environmental protection and low noise etc. The sizes of medium duty TPR wheels are 32mmx76/90/100/125mm and heavy duty 50x100/125/150/200mm. The bearings can be annular bearing, roller bearing, Delrin (plastic) bearing and ball bearing etc. Colors are customized.



CP7C-STC-JTB126.32



CP7C-STC-JTS126.32

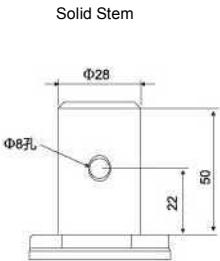

安装尺寸图
FITTING Dimension

Size	Height of Installation	Rotating radius	Plate thickness	Bracket	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
5 inch	128	105	2.5	Injection molding	126	32	145	6202	PU.TPR

1.5 Inch 2 Inch



不锈钢轻型系列

Stainless Steel Caster Series

不锈钢系列


材质为 304 不锈钢，适用于医疗器械，化工行业，食品工业，海产品加工等。具有良好的抗氧化、耐腐蚀特性。304 不锈钢为 国家认可的食品级不锈钢。产品可
选配特灵轴承、440 不锈钢轴承。

The material is 304 stainless steel, suitable for medical devices, chemical industry, food industry, seafood processing, etc. It has good oxidation
resistance and corrosion resistance. 304 stainless steel is a national food grade stainless steel. The product can be equipped with telling bearing and 440
stainless steel bearing.


安装尺寸图
Fitting Dimension

Size	Height of installation	Rotating radius	Plate thickness	Bracket
1.5 inch	60.5	45	2/2	抛光
2 inch	70.5	49.5	2/2	抛光


尺寸单位
Size Units:(Mm)

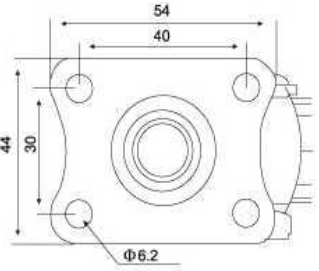

平板
Top plate



丝杆
Threaded stem

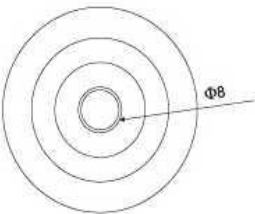

孔顶
Bolt Hole



1.5 Inch 2 Inch

不锈钢轻型系列 PU 轮
Stainless Steel Light Series PU caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
1.5 Inch	40	20	30	6000	PU
2 Inch	50	22	50	6000	PU

锈钢轻型系列 TPR 轮
Stainless Steel Light Series TPR caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
1.5 Inch	40	20	30	6000	TPR
2 Inch	50	22	50	6000	TPR

Bearing: 6000



CP7C-SPU-SPS40.20
CP7C-SPU-SPS50.22



CP7C-SPU-SPB40.20
CP7C-SPU-SPB50.22



CP7C-SPU-SPR40.20
CP7C-SPU-SPR50.22



CP7C-SCT-SPS40.20
CP7C-SCT-SPS50.22



CP7C-SCT-SPB40.20
CP7C-SCT-SPB50.22



CP7C-SCT-SPR40.20
CP7C-SCT-SPR50.22

不锈钢轻型系列 PA 轮
Stainless Steel Light Series PA caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
1.5 Inch	40	20	30	6000	PA
2 Inch	50	22	50	6000	PA

锈钢轻型系列 TPR 导电
Stainless Steel Light Series TPR conductive caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
1.5 Inch	40	20	30	6000	TPR+Conducti ve wire
2 Inch	50	22	50	6000	TPR+Conducti ve wire



CP7C-SPA-SPS40.20
CP7C-SPA-SPS50.22



CP7C-SPA-SPB40.20
CP7C-SPA-SPB50.22



CP7C-SPA-SPR40.20
CP7C-SPA-SPR50.22



CP7C-SDD-SPS40.20
CP7C-SDD-SPS50.22



CP7C-SDD-SPB40.20
CP7C-SDD-SPB50.22



CP7C-SDD-SPS40.20
CP7C-SDD-SPS50.22

镀锌小型系列 PU 轮
Stainless Steel Small Series PU caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
1.5 Inch	38	20	40	608	PU
2 Inch	50	20	50	608	PU
2.5 Inch	63	20	50	608	PU



- CP8P-PUP-SPS38.20
- CP8P-PUP-SPS50.20
- CP8P-PUP-SPS63.20



- CP8P-PUP-SPB38.20
- CP8P-PUP-SPB50.20
- CP8P-PUP-SPB63.20



- CP8P-PUP-SPR38.20
- CP8P-PUP-SPR50.20
- CP8P-PUP-SPR63.20

镀锌轻型系列 TPE 轮
Stainless Steel Light Series TPE caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
2.5 Inch	63	25	70	6001	TPE
3 Inch	75	25	70	6001	TPE
4 Inch	100	25	70	6001	TPE



- CP9P-PEP-SPS63.25
- CP9P-PEP-SPS75.25
- CP9P-PEP-SPS100.25



- CP9P-PEP-SPB63.25
- CP9P-PEP-SPB75.25
- CP9P-PEP-SPB100.25



- CP9P-PEP-SPR63.25
- CP9P-PEP-SPR75.25
- CP9P-PEP-SPR100.25

镀锌轻型系列 PU 轮
Stainless Steel Light Series PU caster



- CP9P-PUP-SPS63.25
- CP9P-PUP-SPS75.25
- CP9P-PUP-SPS100.25



- CP9P-PUP-SPB63.25
- CP9P-PUP-SPB75.25
- CP9P-PUP-SPB100.25



- CP9P-PUP-SPR63.25
- CP9P-PUP-SPR75.25
- CP9P-PUP-SPR100.25

镀锌轻型顶孔系列 PU 轮
Stainless Steel Bolt Hole Light Series PU
caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
2.5 Inch	63	25	70	6001	PU
3 Inch	75	25	80	6001	PU
4 Inch	100	25	80	6001	PU



- CP9P-PUP-JHS63.25
- CP9P-PUP-JHS75.25
- CP9P-PUP-JHS100.25



- CP9P-PUP-JHB63.25
- CP9P-PUP-JHB75.25
- CP9P-PUP-JHB100.25

Bearing1: 608 Bearing2:6001



镀锌轻型丝杆系列 PU 轮
Stainless Steel Threaded Stem Light
Series PU caster

2.5 Inch 3 Inch 4 Inch

Size	Wheel diameter	 kg	Loading Capacity	Bearing	Material
	 mm	 mm			
2.5 Inch	63	25	70	6001	PU
3 Inch	75	25	80	6001	PU
4 Inch	100	25	80	6001	PU



CP9P-PUP-JTS63.25



CP9P-PUP-JTS75.25



CP9P-PUP-JTS100.25



CP9P-PUP-JTB63.25



CP9P-PUP-JTB75.25



CP9P-PUP-JTB100.25



镀锌轻型丝杆系列 TPE 轮
Stainless Steel Threaded Stem Light Series
PU caster

Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm	 kg		
2.5 Inch	63	25	70	6001	TPE
3 Inch	75	25	70	6001	TPE



CP9P-PEP-JTS63.25



CP9P-PEP-JTS75.25



CP9P-PEP-JTS100.25



CP9P-PEP-JTB63.25



CP9P-PEP-JTB75.25



CP9P-PEP-JTB100.25



镀锌轻型顶孔系列 TPE 轮
Stainless Steel Bolt Hole Light Series PU caster

Bearing1: 608 Bearing2:6001



Size	Wheel diameter	Wheel width	Loading Capacity	Bearing	Material
	 mm	 mm			
2.5 Inch	63	25	70	6001	TPE
3 Inch	75	25	70	6001	TPE
4 Inch	100	25	70	6001	TPE



CP9P-PEP-JHS63.25



CP9P-PEP-JHS75.25



CP9P-PEP-JHS100.25



CP9P-PEP-JHB63.25



CP9P-PEP-JHB75.25



CP9P-PEP-JHB100.25

